



Rubinetterie Italiane Velatta SpA

————— since 1950 —————

>> **YOU need the BEST**


*acqua  
marina*  
Series



## RIV 410

Primary shut-off valve with double ball  
 Compact model

### >> Tech drawings and tables

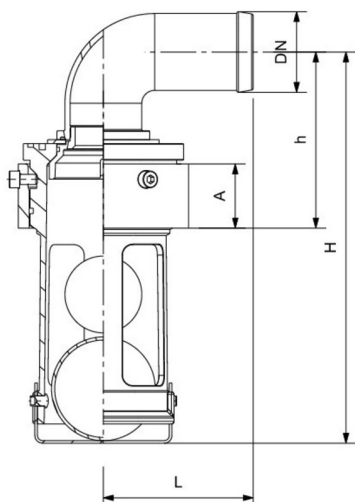

| DN | Codice       | H   | h   | L   | A  | PN           | KG    | P/box |
|----|--------------|-----|-----|-----|----|--------------|-------|-------|
| 60 | 050410000055 | 306 | 138 | 117 | 50 | 3bar - 45psi | 2,820 | 1     |
| 80 | 050410000061 | 353 | 136 | 132 | 52 | 3bar - 45psi | 4,070 | 1     |


## >> Advantages

360° orientation

Techno-polymer basket for a better crash- and corrosion resistance

>> Technical data

**RIV 410**

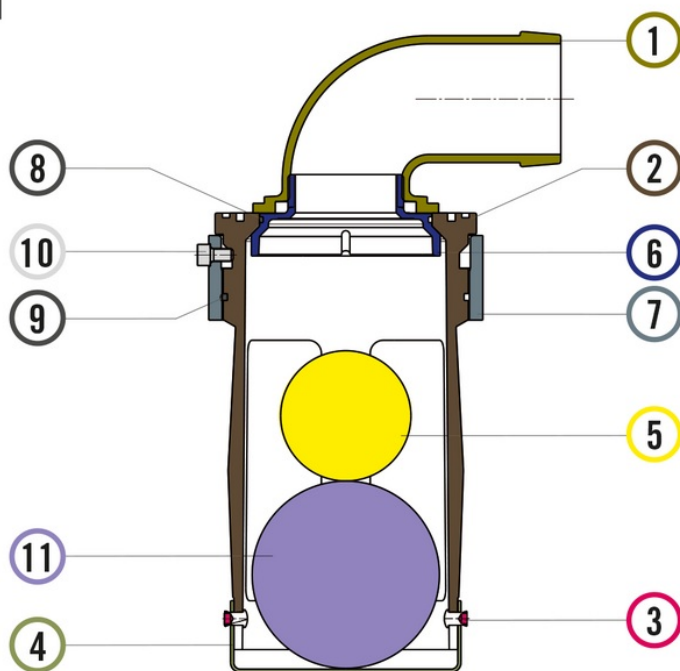

| Materials |                 |                 |          |
|-----------|-----------------|-----------------|----------|
| 1         | Hose Connection | Aluminium       |          |
| 2         | Basket          | PP              |          |
| 3         | Rivet           | Brass           | CW614N   |
| 4         | Bracket         | Stainless Steel | AISI 430 |
| 5         | Ball            | EPDM            |          |
| 6         | Seat            | Brass           | CB754S   |
| 7         | Screwed ring    | Steel           |          |
| 8         | O-Ring          | NBR             |          |
| 9         | O-Ring          | NBR             |          |
| 10        | Screw           | Stainless Steel | AISI 304 |
| 11        | Ball            | PEHD            |          |

| Nr. | Cod.     |
|-----|----------|
| 5   | Riv 9912 |
| 11  | Riv 9911 |

|            |                                                                          |
|------------|--------------------------------------------------------------------------|
| Connection | Hose-connection                                                          |
| Limit      | 0°C (+32°F) without liquid +60°C (+140°F)                                |
| Notes      | The max.working pressure (PN) means at a room temperature of about 23°C. |