



# Oversentersventil enkel Lastholderventil VBCL

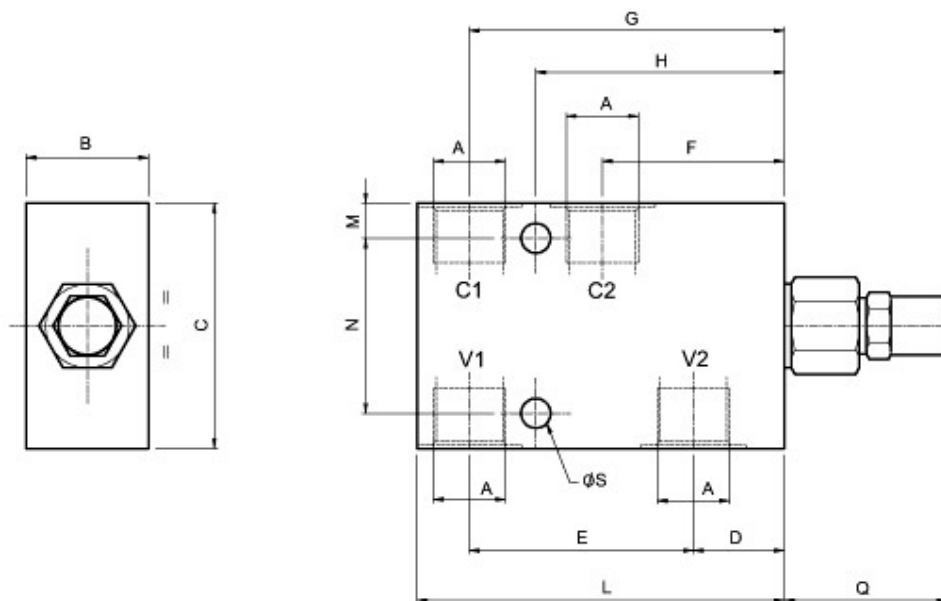


Den enkle oversenterventilen kan kontrollere nedstigningen av en last og stoppe en enkeltvirkende sylinder.



| Type       | A         | Max Flow<br>Ltr/Min. | Max trykk<br>Bar | Trykk Omr.<br>Bar | B<br>mm | C<br>mm | E<br>mm | H<br>mm | L<br>mm | N<br>mm | Pilot Trykk<br>Bar | Varenr.    |
|------------|-----------|----------------------|------------------|-------------------|---------|---------|---------|---------|---------|---------|--------------------|------------|
| VBCL 380 1 | BSPP 3/8" | 40                   | 210              | 30-210            | 30      | 60      | 64      | 71      | 105     | 40      | 1 : 4,25           | BIVBCL3801 |
| VBCL 120 2 | BSPP 1/2" | 60                   | 210              | 60-350            | 30      | 60      | 64      | 71      | 105     | 40      | 1 : 4,25           | BIVBCL1202 |

## Trykkfall

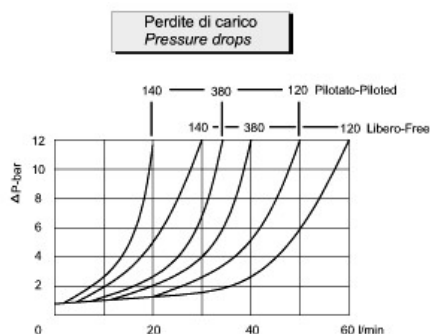

Kan også leveres med  
stålhus :Trykk 350 bar.

To type trykkområder :

1 : 30 - 210 bar

2 : 60 - 350 bar