



Slangebruddsventil volumstyrt - VUBA

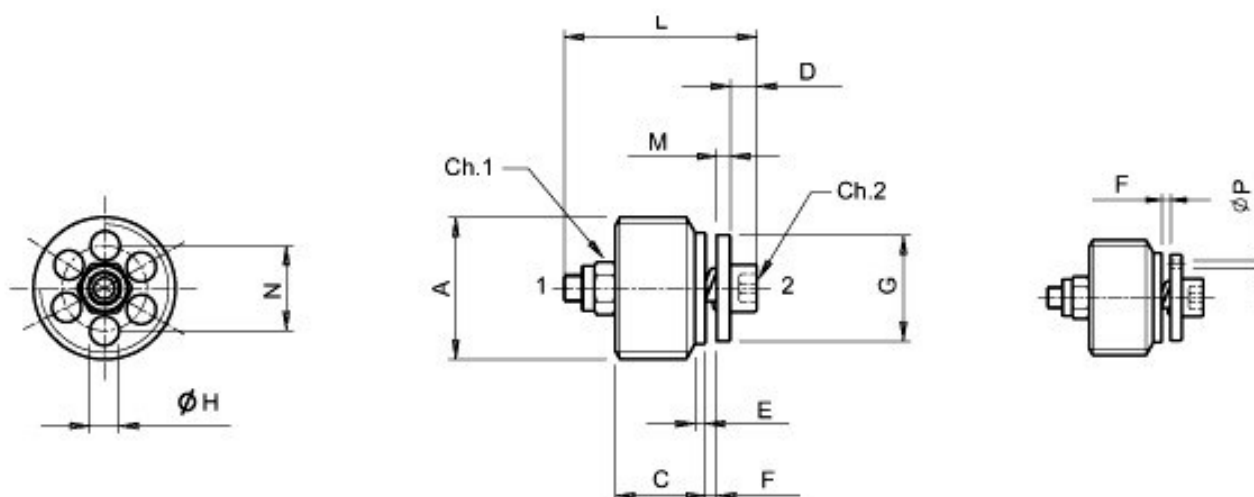


VUBA justerbar slangebruddsventil monteres direkte i sylinderto, eller i et separat hus, for å unngå ukontrollert nedstigning av last i tilfelle av slangebrudd. De er laget av herdet stål.




Type	A	Max Flow Ltr/Min.	Max trykk Bar	C mm	D mm	E mm	G mm	H mm	L mm	M mm	N mm	Ch1 mm	Ch2 mm	Varenr.
VUBA 140	BSPP 1/4"	25	350	8	3	2	10	2,5	19	1,5	8	5,5	2,5	HM10054
VUBA 380	BSPP 3/8"	50	350	11	3	2	12,5	3,25	23	2	9	2,5	2,5	HM10028
VUBA 120	BSPP 1/2"	80	350	13	4	2	15	4,25	29	2	12	3	3	HM10025
VUBA 340	BSPP 3/4"	150	350	18	4	2	17	6,25	34	2	15,5	3	3	HM10055


Trykkfall

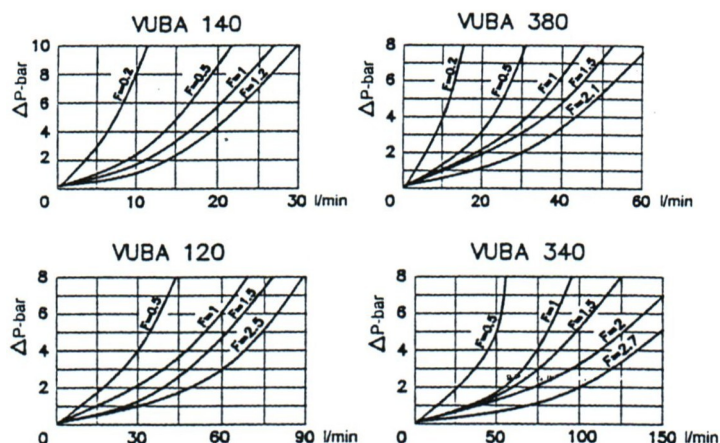

Åpning / flow VUBA ventiler
(ref. forrige side)

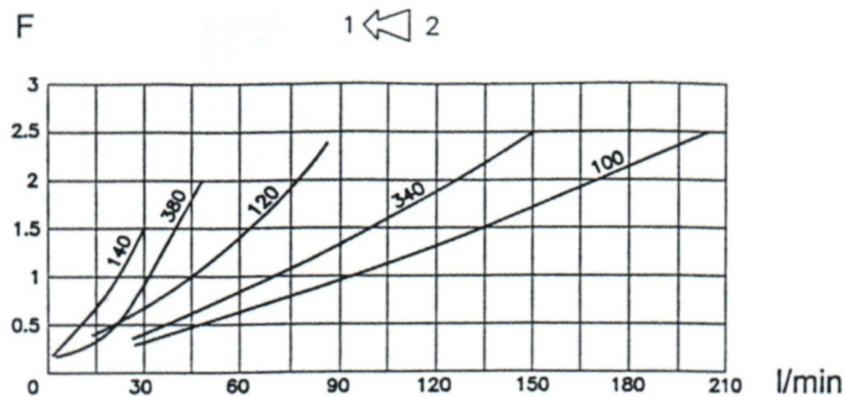

Hus til VUBA og VS
Han/hun

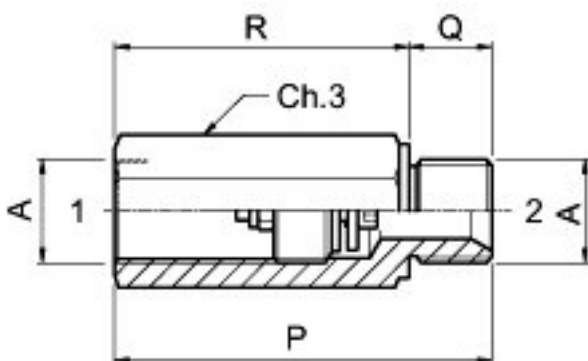

A	R mm	P mm	Q mm	Ch.3 mm	Vekt kg	Varenr.
BSPP 1/4" (Han-Hun)	39	50	11	19	0,07	HM10063
BSPP 3/8" (Han-Hun)	48	60	12	22	0,10	HM10043
BSPP 1/2" (Han-Hun)	49	65	16	27	0,15	HM10041
BSPP 3/4" (Han-Hun)	64	17	16	32	0,23	BI6500130000
BSPP 1" (Hun-Hun)	-	86	-	41	0,44	BI6500140000